

2MP IR Bullet Network Camera

BDTSecure2C22LR6PF46E



Key Features

Optics

- Day/night functionality
- Smart IR, up to 60m (197ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra 265, H.265, H.264
- ROI (Region of Interest)

Network

- ONVIF Conformance

Structure


- Wide temperature range: -30°C ~ 60°C (-22°F ~ 140°F)
- Wide voltage range of $\pm 25\%$
- IP67

Specifications

	BDTSecure2C22LR6F4E			BDTSecure2C22LR6PF40(60)E		
Camera						
Sensor	1/2.7", 2.0 megapixel, progressive scan, CMOS					
Lens	4.0mm@F2.0			4.0mm@F2.0 6.0mm@F2.0		
DORI Distance	Lens (mm)	Detect (m)	Observe (m)		Recognize (m)	Identify (m)
	4.0	60	24		12	6
	6.0	90	36		18	9
Angle of View (H)	4mm:86.5° 6mm:55.4°					
Angle of View (V)	4mm:44.1° 6mm:30.2°					
Angle of View (O)	4mm: 106.4° 6mm: 68.1°					
Shutter	Auto/Manual, 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.01Lux (F2.0, AGC ON) 0Lux with IR on					
Digital noise reduction	2D/3D DNR					
Day/Night	IR-cut filter with auto switch (ICR)					
S/N	>52dB					
IR Range	Up to 60m (197ft) IR range					
WDR	DWDR					
Video						
Video Compression	Ultra 265, H.265, H.264					
H.264 code profile	Baseline profile, Main Profile					
Frame Rate	Main Stream: 1080P (1920*1080), Max25fps; Sub Stream: 4CIF (704*576), Max25fps; Third Stream: CIF (352*288), Max25fps					
HLC	Supported					
BLC	Supported					
OSD	Up to 4 OSDs					
Privacy Mask	Up to 4 areas					
ROI	Up to 2 areas					
Motion Detection	Up to 4 areas					
Network						
Protocols	IPv4, TCP, UDP, RTP, RTSP, DNS, HTTP, DHCP, DDNS, NTP, UPnP					
Compatible Integration	ONVIF (Profile S, Profile T), API					
Interface						
Network	10/100M Base-TX Ethernet					
General						
Power	DC 12V±25%			DC 12V±25%, PoE (IEEE 802.3af)		
	Power consumption: Max 5W					
Dimensions (L × W × H)	169.4 × 98.1 × 92.0mm (6.7" × 3.9" × 3.6")					

Weight	0.38kg (0.84lb)
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67

Dimensions

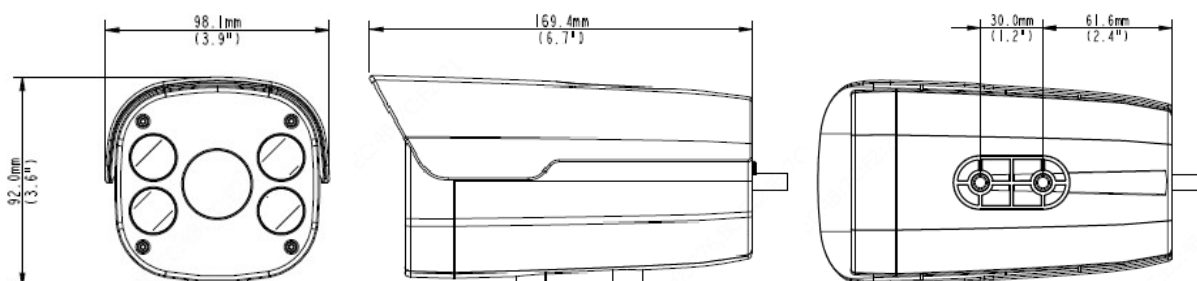

“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.