

BDTSecureDE1800-V2 Series Disk Enclosure



Overview

BDTSecureDE1800-V2, with high performance, high reliability, high density, high scalability, is an affordable high-level disk enclosure developed especially for videosurveillance.

Features

High-Quality Hardware Design




- high performance
12Gbps SAS-3 technology provides superior performance experience
- High density
The innovative enclosure with 801mm depth and 4U height that holds up to 48 disks, is space-saving .
- Redundant power supplies
The hot-swappable power supply is designed in redundancy and load balancing mode. Automatic power switching in case of failure and online replacement of failed power supply are supported.
- Power protection
Disk powered on sequentially during system startup, protection from impulse current.
- Multistage fan speed and energy saving
Fans with multistage speed are configured in the hot-swappable frame in redundancy mode. System power consumption can be balanced intelligently with heat dissipation calculation to ensure low power consumption and stable operation of the system.

Specifications




Item	BDTSecureDE1848-V2	BDTSecureDE1824-V2
Controller	1	
Management Interface	2 Serial port	
Back-end Expansion Interface	2-port 4*12 Gbps Mini SAS HD	2-port 4*12 Gbps Mini SAS HD (Primary) 2-port 2*12 Gbps Mini SAS HD (Backup)
HDD	48 SATA Interfaces	24 SATA Interfaces
Disk Capacity	1 TB, 2 TB, 3 TB, 4 TB , 5 TB, 6 TB,8TB,10TB, 12TB,14TB	
Dimension (WxDxH)	482mm X801mm X 178mm Note: for standard cabinet with 1000mm depth or above	482mm X589mm X 175mm
Power Consumption	410W (fully loaded)	250W (fully loaded)
Power Supply	100V – 127V/200V – 240V AC; 60Hz/50Hz	
Weight	Fully loaded: 60< kg	Fully loaded: < 38kg
Authentication certificate	CE, FCC, UL	
Operating temperature	5°C ~ 40°C / 41°F ~ 104°F	
Recommended temperature	10 °C~ 35 °C / 50°F ~ 95°F	
Humidity	20%~80% RH (non-condensing)	

Dimensions

BDTSecureDE1848-V2

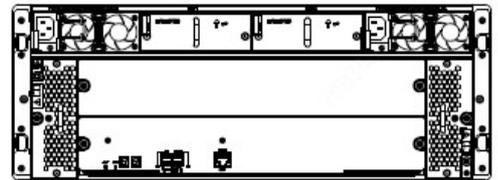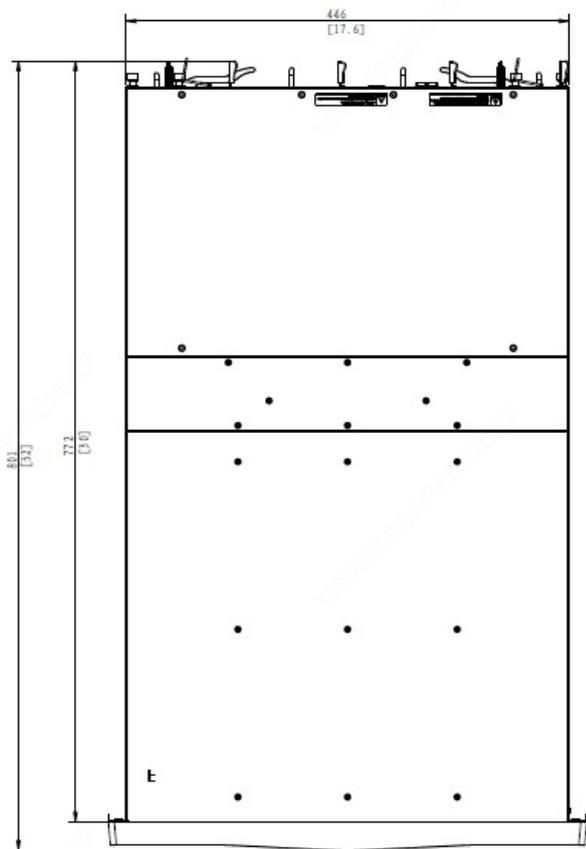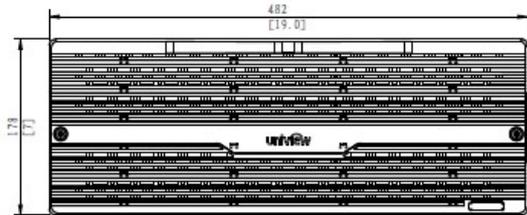

BDTSecureDE1824-V2

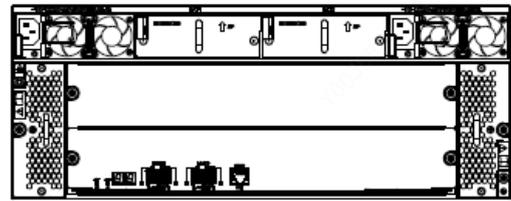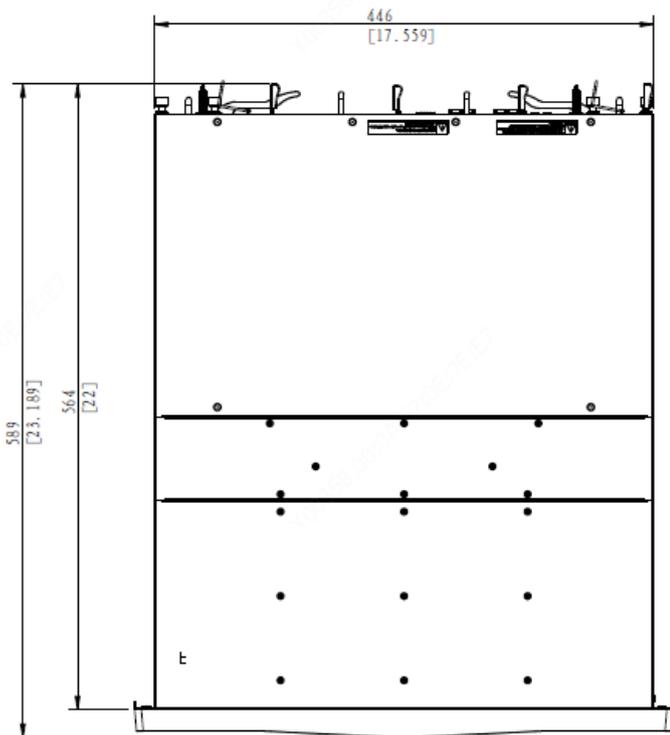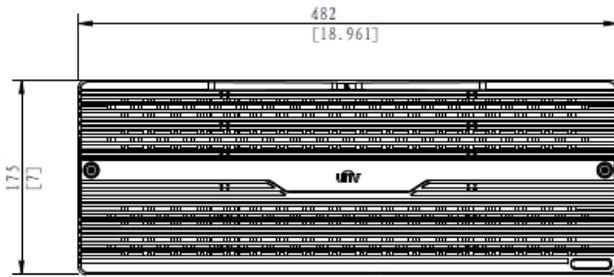



“Your Reliable Integrated Video Surveillance Solutions Provider”

Shenzhen Starlink Technology Co.,Ltd

1811, Block A, Zhantao Technology Building, Longhua District, Shenzhen, P.R.China 518131

Email: info@qixingtechnology.com; qixing@qixingtechnology.com

<https://www.qixingtechnology.com>

©2009-2018 Shenzhen Starlink Technology Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.